


# Aerial FTTH Drop Cable

## 99705

Simple structure light weight FTTH cable with special bend insensitive fibers provides high bandwidth and excellent transmission properties. Two parallel FRP strength members ensure good performance of crush resistance to protect the fiber. Single steel wire as the additional strength member ensures good performance of tensile strength. Easily strip each unit and easily separate the fiber from the sheath.




**Fiber+**

### Product specification

Cable p/n	99705
Fiber type	G.657A Bend-Insensitive Single-Mode Fiber
Attenuation (dB/km)	$\leq 0.4$ at 1310nm, $\leq 0.3$ at 1550nm
Outer sheath material	Flame Retardant Black Polyethylene
Cable Dimension (mm)	2.0X5.3( $\pm 0.15$ )
Cable weight (kg/km)	21.7
Maximum tensile strength (N)	600
Maximum Span Length (m)	30
Operating temperature (°C)	-20~+60

RoHS (Restriction of Hazardous Substances) compliance.

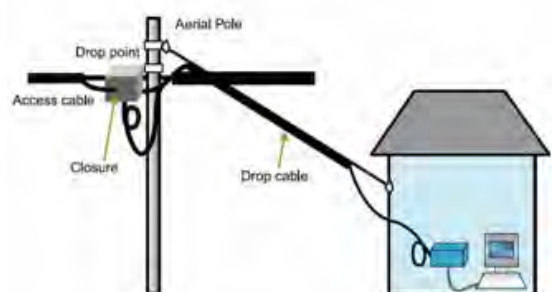

Example of Installation.