


Kabelska spojka / Dome Closure FOSC GP03

The FOSC GP03 is the environmentally sealed Dome type closure for the fiber managements system that provides the functions of splice and passive component integration in the external network.

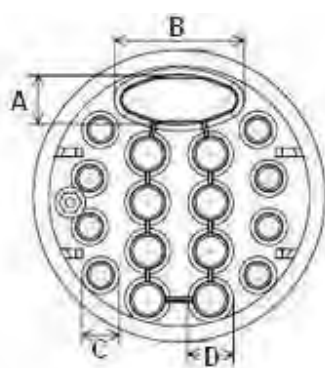

Fiber+


Predstavitev / Introduction

Spojka ima en ovalni vhod za 2 ne-odrezana kabela in 16 vhodov-izhodov za kable in prostor za shranjevanje kabelskih elementov in odvečnih vlaken. Ovalni vhod (A, B) sprejme 2 ne-odrezana kabela premera 12 do 25mm, 8 manjših okroglih vhodov (C) sprejme po 1 kabel premera 5 do 13.5mm in 8 večjih okroglih vhodov (D) sprejme po 1 kabel premera 5 do 20mm.

One oval port for uncut cable and 16 round ports for single cable entry-exit are provided in the base. The oval port accepts 2 uncut cables with diameter from 12 to 25mm, 8 smaller round ports (C) accept single cables with diameter from 5 to 13.5 mm, and 8 larger round ports (D) accept single cables with diameter from 5 to 20 mm.

Functions and Features

- Single-ended design
- Base and dome are sealed with a clamp and O-ring system
- 16 round entry / exit ports for drop cables and 1 oval ports for looped cable
- Maximum capacity: 288 fibers.
- Maximum tray capacity: 12F
- Compatible with most common cable types: eg. Loose type, central core, ribbon fiber
- Uncut fibers can be stored as single circuits in trays and/or as cable elements in the storage space between the profiles. Storage baskets are available for mass storage of fibers of central core cable constructions

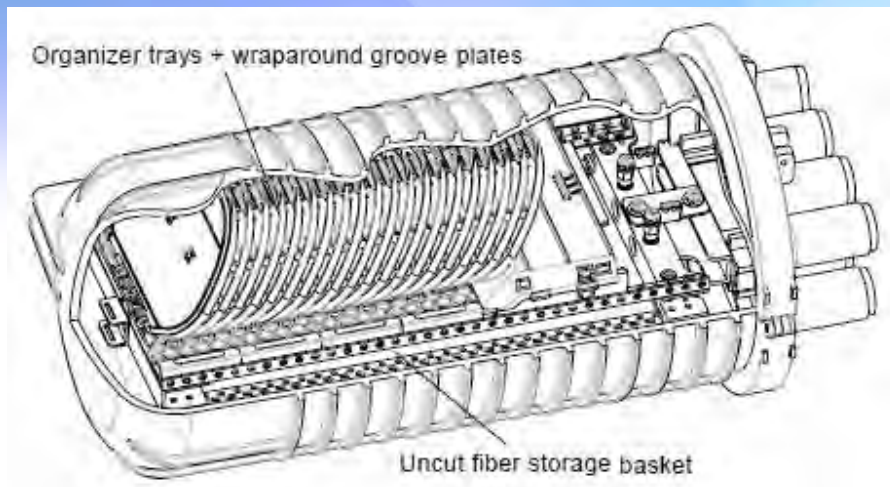

Dimenzije / Dimensions (mm)

Skupna dolžina / Length with base	503
Premer spojke / Diameter of the closure	285
Ovalni vhod / Oval port A x B	31.6 x 90.6
Zunanji premer vhoda / Outer diameter of port C	16
Zunanji premer vhoda / Outer diameter of port D	21.68

Pakirano 2 spojke v paketu 59 x 54 x 31 cm, teža 17kg / Packed 2 closures in 1 package 59 x 54 x 31 cm, weight 17kg

Vsebina kompleta / Scope of supply

Ohišje s pokrovom in veznim obročem, tesnilna guma, okvir, 24 kaset, 8 skrčnih cevi za okrogle vhode, 1 skrčna cev za ovalni vhod, zaščitne cevke, klinasti vložek, ozemljitvena sponka, zračni ventil, plošča za pritrditev spojke, zaščitna folija, brusni papir, čistilni robčki in sušilo.	Dome, 24 fiber tray, Base with strength member connector, Dome-to-base Clamp, O-ring, 2 Storage basket, Valve, Fixing part, 8 Heat-shrinkable sleeve for round port, 1 Heat-shrinkable sleeve for oval port, Branching clips, Protecting tube, Adhesive tape, Cleaning tissue, and Drier.
--	---

Podatki za naročilo / Ordering information

Koda / Item	Ime izdelka / Description
015YE	Kabelska spojka FOSC GP03 za 288 zvarov / Splice closure FOSC GP03 for 288 splices, EZZ