




UC900 SS27 Cat.7 PUR

S/FTP

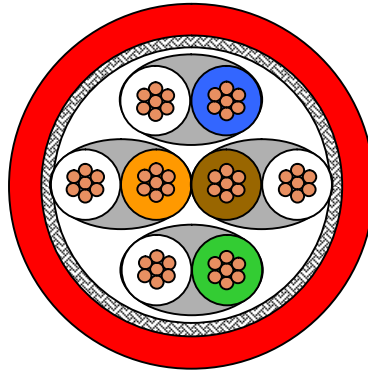

Application

Tertiary (horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Standards

EIA/TIA 568A;
ISO/IEC 11801 2nd ed.; IEC 61156-6
EN 50173-1; EN 50288-4-2

Flame resistance

LSHF (FRNC): IEC 60332-1; IEC 60754-2; IEC 61034

Construction

Conductor	stranded bare copper wire Ø 0.42 mm (AWG 27/7)
Insulation	Foam Skin Polyethylene, Ø 0.98 mm
Twisting	2 cores to the pair
Pair screen	Al-laminated plastic foil
Cable lay up	4 pairs (PiMF) to the core
Screen	Copper braid, tinned
Sheath	PUR, red



UC900 SS27 Cat.7 PUR

Mechanical properties

Bending radius	without load	≥ 25 mm
	with load	≥ 50 mm
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 340 Ω/km
Resistance unbalance		≤ 3%
Insulation resistance	(500 V)	≥ 2000 MΩ*km
Mutual capacitance	at 800 Hz	Nom. 43 nF/km
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km
Characteristic impedance	(1-100 MHz)	(100 ± 15) Ω
	(100 - 250) MHz	(100 ± 18) Ω
	(250 - 600) MHz	(100 ± 25) Ω
Nominal velocity of propagation		ca. 79 %
Propagation delay		≤ 427 ns/100m
Delay skew		≤ 12 ns/100m
Test voltage	(DC, 1 min) core/core and core/screen	1000 V
Transfer impedance	at 1 MHz	≤ 25 mΩ/m
	at 10 MHz	≤ 15 mΩ/m
	at 30 MHz	≤ 30 mΩ/m

Electrical data (nominal)

acc. to Cat.7 (at 20°C)

F (MHZ)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1.0	0.3	90	87	90	80	77	23
4.0	0.6	90	87	89	80	77	24
10.0	1.0	90	87	89	80	77	25
16.0	1.3	90	87	89	76	73	25
20.0	1.4	90	87	89	74	71	25
31.2	1.8	90	87	88	70	67	25
62.5	2.6	90	87	87	64	61	23
100.0	3.2	87	84	84	60	57	21
125.0	3.6	85	82	81	58	55	20
155.5	4.0	84	81	80	56	53	19
175.0	4.3	83	80	79	55	52	19
200.0	4.6	82	79	77	54	51	18
250.0	5.1	81	78	76	52	49	18
300.0	5.6	80	77	74	50	47	17
450.0	6.9	77	74	70	47	44	17
600.0	7.9	75	72	67	44	41	17
750.0	8.7	73	70	64	42	39	
900.0	9.7	72	69	62	41	38	



UC900 SS27 Cat.7 PUR

Technical data

Product code	Cable type	Brand name	Colour	Outer diameter mm	Fire load		Weight kg/km	Copper content	Tensile force
					MJ/km	kWh/m			N
CD2783922	Li-02YSC11Y 4x2x0,42L PiMF	UC900 SS27 Cat.7 PUR S/FTP 4P	red	5,9	383	0,106	37	24	100