


UC900 SS23 Cat.7 LSHF-FR C_{ca} s1a d1 a1

S/FTP AWG23/1

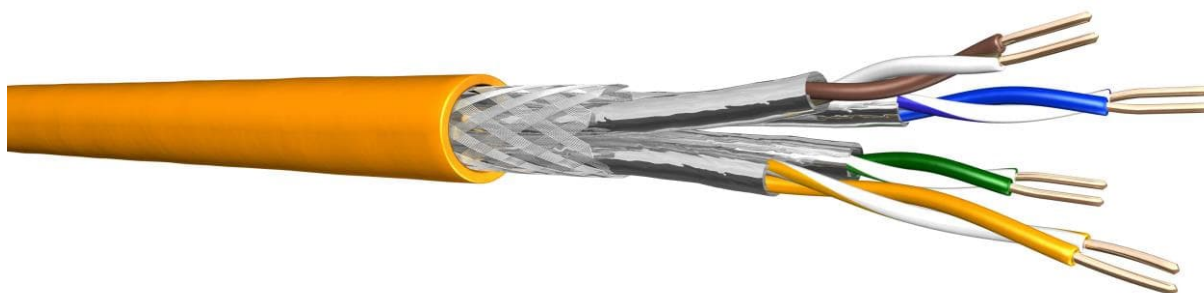

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T
IEEE 802.5 16 MB; ISDN; TPDDI; ATM
Power over Ethernet (PoE) / Type 1-4

Standards

EN 50173-1; EN 50288-4-1
ISO/IEC 11801; IEC 61156-5
IEEE 802.3af / at / bt

Flame resistance

EN 50399: Class C_{ca} s1a d1 a1
LSHF-FR (LSOH-FR): IEC 60332-1; IEC 60332-3-24; IEC 60754-2; IEC 61034

Construction

Conductor	bare copper wire, Ø 0.56 mm (AWG 23/1)
Insulation	Foamskin PE, Ø 1.38 mm
Twisting	2 cores to the pair
Pair screen	Al-laminated plastic foil
Cable lay up	4 pairs (PiMF) to the core
Screen	copper braid, tinned
Sheath	LSHF-FR, orange Duplex sheath: two cables parallel, separable

Mechanical properties

Bending radius	without load	4 x D
	with load	8 x D
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

UC900 SS23 Cat.7 LSHF-FR C_{ca} s1a d1 a1

Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 154 Ω/km	
Resistance unbalance		≤ 2%	
Resistance unbalance between pairs		≤ 5%	
Insulation resistance	(500 V)	≥ 2000 MΩ*km	
Mutual capacitance	at 800 Hz	nom. 43 nF/km	
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km	
Mean characteristic impedance	100 MHz	100 ± 5 Ω	
Nominal velocity of propagation		ca. 79 %	
Delay skew		ca. 12 ns/100m	
Test voltage	(DC, 1 min) core/core and core/screen	1000 V	
Transfer impedance	at 1 MHz	≤ 5 mΩ /m	Grade 1
	at 10 MHz	≤ 5 mΩ /m	
	at 30 MHz	≤ 10 mΩ /m	
Coupling attenuation		≥ 85 dB	Type 1
Segregation classification acc. EN 50174-2			„D“

Electrical data (nominal)

acc. to Cat.7 (at 20°C)

f (MHz)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ACRF (dB/100m)	PS-ACRF (dB/100m)	Return loss (dB)
1,0	1,8	100	97	98	95	105	105	-
4,0	3,4	100	97	97	94	105	102	27
10,0	5,4	100	97	95	92	97	94	30
16,0	6,8	100	97	93	90	93	90	30
20,0	7,7	100	97	92	89	91	88	30
31,2	9,6	100	97	90	87	87	84	30
62,5	13,7	100	97	86	83	81	78	30
100,0	17,4	100	97	83	80	77	74	30
125,0	19,5	95	92	75	72	75	72	26
155,5	21,9	94	91	72	69	73	70	26
175,0	23,3	93	90	70	67	72	69	25
200,0	25,0	92	89	67	64	71	68	25
250,0	28,1	90	87	62	59	69	66	24
300,0	30,9	89	86	58	55	67	64	24
450,0	38,3	87	84	48	45	64	61	23
600,0	44,8	85	82	40	37	61	58	22
750,0	52,0	83	80	31	28	59	56	21
900,0	59,4	82	79	23	20	58	55	20
1000,0	63,1	80	77	17	14	57	54	20

UC900 SS23 Cat.7 LSHF-FR C_{ca} s1a d1 a1

Product order data

Product code	Cable type	Brand name	OD mm	Euro class	Fire load		Weight kg/km	Copper content	Tensile force N
					MJ/km	kWh/m			
60091660,	J-02YSCH 4x2x0,56 PiMF	UC900 SS23 C7 S/FTP 4P	7.3	C _{ca} s1a d1 a1	580	0,16	65	38	150
60060629		UC900 SS23 C7 S/FTP 4P 1000DW							
60091940		UC900 SS23 C7 S/FTP 4P 500DW							
60091664		UC900 SS23 C7 S/FTP 4P 250DW							
60091665		UC900 SS23 C7 S/FTP 4P 250BR							
60091662		UC900 SS23 C7 S/FTP 4P 200RW							
60091661		UC900 SS23 C7 S/FTP 4P 100RW							
60091666		UC900 SS23 C7 S/FTP 4P 400DO							
60065309	J-02YSCH 2x4x2x 0,56 PiMF	UC900 SS23 C7 S/FTP 2x4P	7.5 x 15.2	C _{ca} s1a d1 a1	1180	0,33	131	76	300
60065310		UC900 SS23 C7 S/FTP 2x4P 500DW							
60091672		UC900 SS23 C7 S/FTP 2x4P 250DW							
60091673		UC900 SS23 C7 S/FTP 2x4P 100DW							
60091674		UC900 SS23 C7 S/FTP 2x4P 200DO							

© PRYSMIAN GROUP 2012, All Rights Reserved

All sizes and values without tolerances are reference values, Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.