




Cable structure  
 1. Outer Jacket LSOH (white/ivory/black color)  
 2. Fiber Glass Rod  
 3. Optical Fibers 250µm

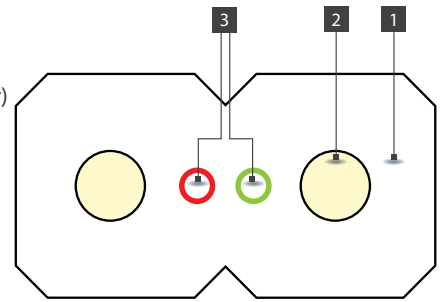

## Configuration


VC-DCS	
No. of Fibers	1-4F 250µm
Outer diam [mm]	2,0x3,1 ±0,1
Tensile load perm/inst. [N]	50/100
Weight [kg/km]	8,3 ±1
Min. bend radius [mm]	15-40mm
Crush [N/10cm]	1000

\*-depends on fiber type

### Applications

- FTTH Drop cable with Fiber Glass reinforcement rod's
- For customer connection
- Fully dielectric cable
- Last mile connection
- LAN and FTTH networks
- Distribution network
- ODF connections
- Inside house OLT connection

## Bend radius/maximum attenuation

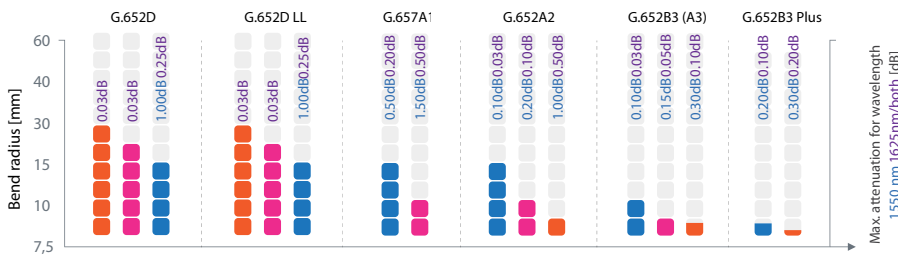

### Features

- Fibre glass strength rod's,
- Optical fibres 250µm
- Outer jacket LSOH,

## Operating temperature

