

PushCleaner™

Fiber Optic Cleaner

Special Features

- Push type
- Thin type to clean SFP on bottom of PCB direct
- Both for Adapter / Bulkhead / Receptacle and Patchcord Connector
- 800⁺ cleans per unit
- Best Cleaning Effect
- Cleaning Cost Save
- Used advanced cleaning thread which has better suction oil and dust than present swabs
- Easy and Simple and Pocket Portable
- Windows for showing the remain cleaning times
- Very useful cleaner in field



Specifications

Model Name	PushCleaner
No. of cleanings per unit	800 ⁺
Housing Material	Plastic
Cleaning Thread	Special Yarn
Length (included Cap)	160mm
Thickness ¹	13mm
Packing	Individual
Weight	10g

¹ Thickness of PushCleaner is thin to clean Optical Module (Receptacle, SFP) on bottom of PCB direct.




How To Clean :

1. Adapter / Bulkhead side: Push to Adapter
2. Connector side: Join Cap and Push to Connector
3. APC side: Push APC side toward APC Key

Ordering Information :

- PushCleaner-2.5 : For SC / FC / ST / E2000
 PushCleaner-1.25 : For LC / MU
 PushCleaner-2.0 : For 2.0mm LEMO type
 PushCleaner-1.6 : For Harsh Environment 1.6 mm type
 PushCleaner-3.2 : For 3.2mm SMA type

[Note: We can make the Tip for any customer connector and adapter types.]

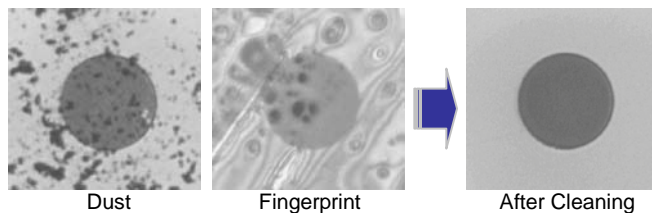

TheFibers
 CREATIVE FIBERS

Manufacturer : TheFibers Inc.
 A-1109 Keumkang Penterium IT Tower, 282 Hagui-ro, Anyang-City, Korea
 Tel: +82-31-381-6108 Fax: +82-31-381-6109 sales@thefibers.com