


Type:	Metrojet MK-LX6	REV: 4.1
Issued:	06/10/2014	SK
Modified:	20/08/2015	PB

**MetroJET MK-LX6 Multi Loose Tube microcable (up to 72F)**

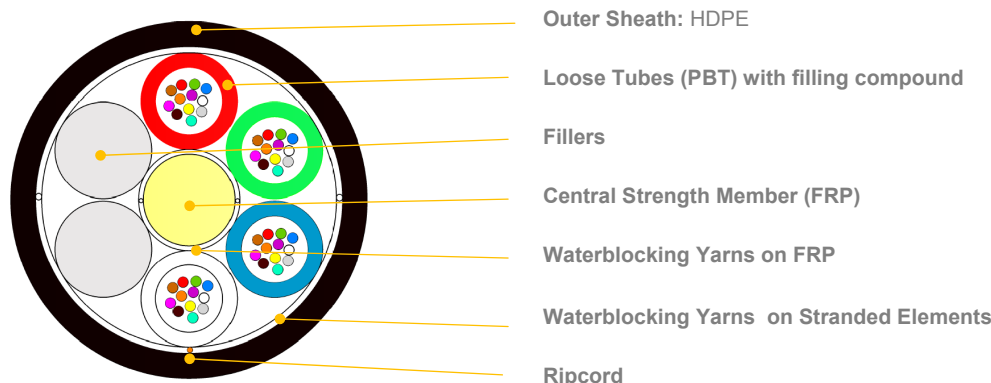

\*Schematic drawing, not to scale

**APPLICATION:**

Microduct cabling air-blowing system application  
 Metro networks  
 Flexible network design  
 Distribution network

**DESIGN:**

HDPE, UV stabilized external jacket with low coefficient of friction  
 Loose tubes (and fillers), SZ stranded around the CSM  
 Each PBT tubes containing 2-12 pcs optical fibres  
 Smallest outer diameter for blowing into 8mm (ID) ducts

**CONFIGURATIONS:**

Variant	Quantity [pcs]					Ø nominal (±5%) [mm]	Nominal weight (±10%) [kg/km]
	Fibres	Fibres per tube	Total elements	Active tubes	Fillers		
1T x 4F	4	4	6	1	5	5.6	28
1T x 6F	6	6	6	1	5	5.6	28
1T x 8F	8	8	6	1	5	5.6	28
2T x 6F	12	6	6	2	4	5.6	29
4T x 6F	24	6	6	4	2	5.6	29
6T x 6F	36	6	6	6	0	5.6	29
1T x 12F	12	12	6	1	5	5.6	30
2T x 12F	24	12	6	2	4	5.6	30
3T x 12F	36	12	6	3	3	5.6	30
4T x 12F	48	12	6	4	2	5.6	31
5T x 12F	60	12	6	5	1	5.6	32
6T x 12F	72	12	6	6	0	5.6	33
*							

\*Other fibre counts are also available on demand

**APPLICATION:**

<b>Suggested Duct - Ø (min)</b>	mm	16/12mm, 14/12mm, 12/10mm, 14/10mm, 12/8mm, 10/8mm		
<b>Temperature Range</b>	Transport & Storage:	- 40 to + 70°C	<b>Minimum Bending Radius</b>	
	Installation:	- 15 to + 60°C		Dynamic: 20 x cable Ø
	Operation:	- 30 to + 70°C		Static: 10 x cable Ø

**MAIN MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS** (according to IEC 60794-5 and EN 187000)

Test	Test Standard	Specified Value	Requirement*
Max Installation Tension	IEC 60794-1-2-E1	750 N	$\Delta\epsilon_r \leq 0.33\%$ , $\Delta\alpha$ reversible
Max Operation Tension	IEC 60794-1-2-E1	250 N	$\Delta\epsilon_r \leq 0.05\%$ , $\Delta\alpha \leq 0.05$ dB/km
Crush	IEC 60794-1-2-E3	1000 N / 100 mm, max. 15 min	$\Delta\alpha$ reversible, no damage
Impact	IEC 60794-1-2-E4	10 Nm, 3 impacts, R= 300 mm	$\Delta\alpha \leq 0.05$ dB after the test
Torsion	IEC 60794-1-2-E7	100N, +/- 180°, 10 cycles	$\Delta\alpha \leq 0.05$ dB, no damage
Repeated Bending	IEC 60794-1-2-E6	R=20x D, 100N, 35 cycles	no damage
Cable Bend	IEC 60794-1-2-E11	R=20x D, 4 turns, 3 cycles	$\Delta\alpha \leq 0.05$ dB, no damage
Temperature Cycling	IEC 60794-1-2-F1	-15°C to +60°C -30°C to +70°C	$\Delta\alpha \leq 0.05$ dB/km $\Delta\alpha \leq 0.10$ dB/km
Water Penetration	IEC 60794-1-2-F5B	sample=3m, water column=1m, 24h	no water leakage

(\*) values for single-mode fibres, all optical measurements performed at @1550nm

Type:	Metrojet MK-LX6	REV: 4.1
Issued:	06/10/2014	SK
Modified:	20/08/2015	PB

**OPTICAL FIBRES AND LOOSE TUBES COLOUR IDENTIFICATION**

Fibres and tubes identification information see **DSH\_Colors\_CODE\_XXXX** document.

**FIBRES PARAMETERS**

Optical fibres parameters see **DSH\_OFP** document.

**MARKING**

The following print (white / inkjet) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (Product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: METROJET MK-LX6 72F SM G652D 6T12F "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is  $\pm 0,5\%$ . Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

**PACKING**

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Identification information will be placed on drum's flange.

**DELIVERY LENGTH**

2000 – 8000 meters  $\pm 5\%$ , with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

**Important notice**

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.