
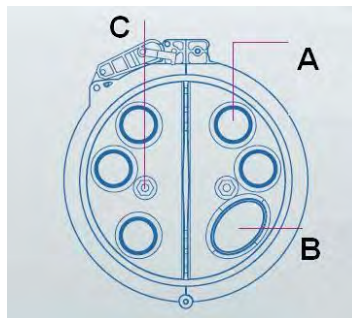


## Kabelska spojka / Dome Closure FOSC GJS03E

The FOSC GJS03E Dome Fiber Optic Closure is a single ended environmentally sealed enclosure for fiber management in the outside plant network. Suitable for Aerial, Pole, Wall, Pipeline and Burial installations. Structure includes molded housing made of high density Polypropylene materials with mechanical integrity, moisture and corrosive resistant steel inner/outer fastener components, Polycarbonate dome clamp and IP66 rated.

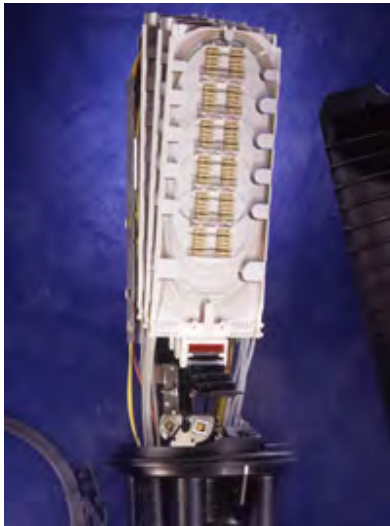

**Fiber+**


### Predstavitev / Description

Spojka GJS03E ima en ovalni vhod za 2 ne-odrezana kabla, 5 okroglih vhodov za drop kable in prostor za shranjevanje kabelskih elementov in odvečnih vlaken. Zmogljivost je 576 zvarov. Ovalni vhod (B) sprejme 2 ne-odrezana kabla premera od 10 do 25 mm, 5 okroglih vhodov (A) sprejme po 1 kabel premera od 5 do 32 mm. Predvidene so 2 ozemljitvene sponke (C). Spojka ima vgrajenih 8 kaset, vsaka sprejme od 24 do 72 ščitnikov zvara. Zaradi modularne izvedbe in robustne izdelave je primerna tudi za industrijsko rabo.

The GJS03E Dome Fiber Optic Enclosure has 6 cable entries - 1 large oval, 5 round for drop cables and accommodates up to 576 single core fibers for outdoor applications. The oval port (B) accepts 2 uncut cables with diameter from 10 to 25 mm and 5 round ports (A) accept single cables with diameter from 5 to 32 mm. Optional ground feed-through lugs (C) are provided. The GJS03E employs 8 Splice Trays (24-72 fibers) and provides users with a quality fiber optic Dome type cable enclosure for commercial and industrial installations.

## Functions and Features

- Single-ended design
- Base and dome are sealed with a clamp and O-ring system
- 5 round entry / exit ports for drop cables and 1 oval ports for looped cable
- Maximum capacity: 576 fibers.
- Maximum tray capacity: 72F
- Compatible with most common cable types: eg. Loose type, central core, ribbon fiber
- Uncut fibers can be stored as single circuits in trays and/or as cable elements in the storage basket

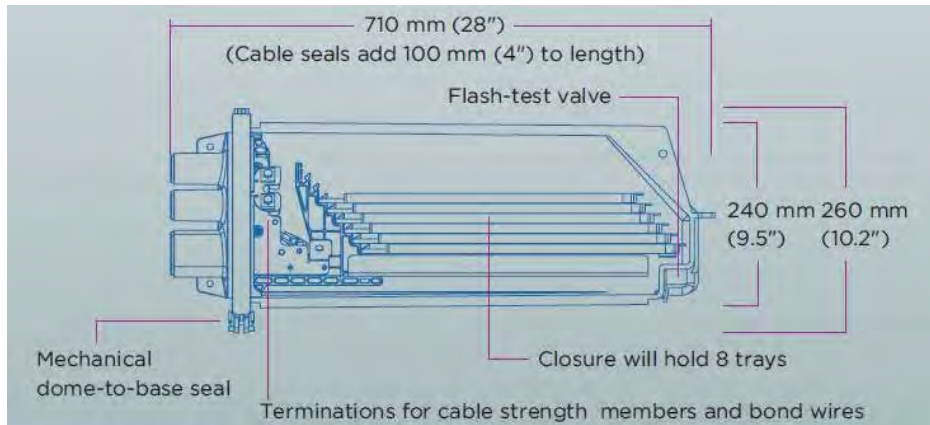

## Dimenzije / Dimensions (mm)

Skupna dolžina / Length with base	710
Premer spojke / Diameter of the closure	300
Ovalni vhod / Oval port (B)	40 x 60
Zunanji premer okroglega vhoda / Outer diameter of round port (A)	33

Pakirano 2 spojke v paketu 75x61x36 cm, teža 19.4kg / Packed 2 closures in 1 package 75x61x36 cm, weight 19.4kg

## Vsebina kompleta / Scope of supply

Ohišje s pokrovom in veznim obročem, tesnilna guma, montažni okvir, 8 velikih kaset, 5 skrčnih cevi za okrogle vhode, 1 skrčna cev za ovalni vhod, zaščitne cevke, klinasti vložek, ozemljitvena sponka, zračni ventil, pritrdilna plošča, zaščitna folija, brusni papir, čistilni robčki in sušilo.

Dome, 8 fiber tray, Base with strength member connector, Dome-to-base Clamp, O-ring, Storage basket, Valve, Ground lugs, 5 Heat-shrinkable sleeve for round port, 1 Heat-shrinkable sleeve for oval port, Branching clips, Protecting tube, Tie-wraps, Cleaning tissue, and Drier.

## Podatki za naročilo / Ordering information

Koda / Item	Ime izdelka / Description
015YK	kabelska spojka FOSC GJS03E za 576 zvarov / splice closure FOSC GJS03E for 576 splices, EZZ